


### Pole Auger Bits with WeldTec™

POLE AUGER BIT

## FEATURES

1. Welded high speed steel cutting edge is sharper and larger so it cuts faster and lasts longer in dense, treated, or creosote-soaked wood.\*
2. Feed screw is 50% larger and has a 10% faster pitch and is designed specifically for drilling deep holes in dense wood.\*
3. Flutes are nearly two times wider for maximum chip removal in deep holes.\*
4. Clean cutting spur is located opposite the cutting edge. It scribes the hole before cutting for cleaner, faster drilling and more efficient transfer of chips to the flute, enhancing overall drilling speed.
5. Available in both 7/16" and 5/8" impact rated shank sizes.

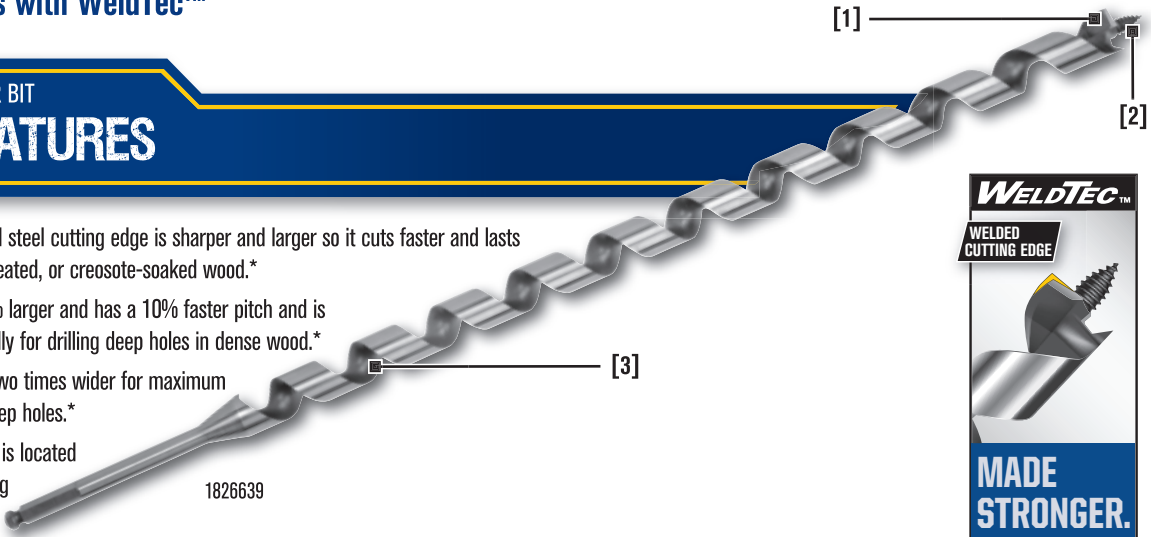

\* vs. standard pole augers.

### 18" Pole Auger Bits with WeldTec™



1826635

Diameter	Shank Size	Twist Length	Overall Length	Item #
11/16"	5/8"	15"	18"	1826304
11/16"	7/16"	15"	18"	1826632
13/16"	5/8"	15"	18"	1826305
13/16"	7/16"	15"	18"	1826633
15/16"	5/8"	15"	18"	1826626
15/16"	7/16"	15"	18"	1826634
1-1/16"	5/8"	15"	18"	1826627
1-1/16"	7/16"	15"	18"	1826635

### 24" Pole Auger Bits with WeldTec™



1826639

Diameter	Shank Size	Twist Length	Overall Length	Item #
11/16"	5/8"	21"	24"	1826628
11/16"	7/16"	21"	24"	1826636
13/16"	5/8"	21"	24"	1826629
13/16"	7/16"	21"	24"	1826637
15/16"	5/8"	21"	24"	1826630
15/16"	7/16"	21"	24"	1826638
1-1/16"	5/8"	21"	24"	1826631
1-1/16"	7/16"	21"	24"	1826639

### 29" Pole Auger Bits with WeldTec™



1826649

Diameter	Shank Size	Twist Length	Overall Length	Item #
1/2"	7/16"	24"	29"	1826640
9/16"	7/16"	24"	29"	1826641
5/8"	7/16"	24"	29"	1826642
11/16"	7/16"	24"	29"	1826643
3/4"	7/16"	24"	29"	1826644
13/16"	7/16"	24"	29"	1826645
7/8"	7/16"	24"	29"	1826646
15/16"	7/16"	24"	29"	1826647
1"	7/16"	24"	29"	1826648
1-1/16"	7/16"	24"	29"	1826649

WOOD DRILLING