


RECIPROCATING SAW BLADE SELECTION GUIDE


	WOOD	NAIL-EMBEDDED WOOD	NON-FERROUS METAL	DEMOLITION	FIRE & RESCUE	PLASTICS & COMPOSITES	THICK METAL	MEDIUM METAL	THIN METAL	DRYWALL/PLASTER	TILE & GRANITE	CAST IRON	ABRASIVES
													
BEST	DEMOLITION CT™	LENOX Gold® POWER ARC™ CURVED BLADES							BI-METAL	LENOX DIAMOND™	LENOX DIAMOND™		
BETTER	LENOX Gold® POWER ARC™ CURVED BLADES	LAZER®	BI-METAL		LAZER®		—	CARBIDE GRIT	CARBIDE GRIT				
GOOD	BI-METAL	BI-METAL	—		BI-METAL		—	—	—				

TEETH PER INCH SELECTION GUIDE

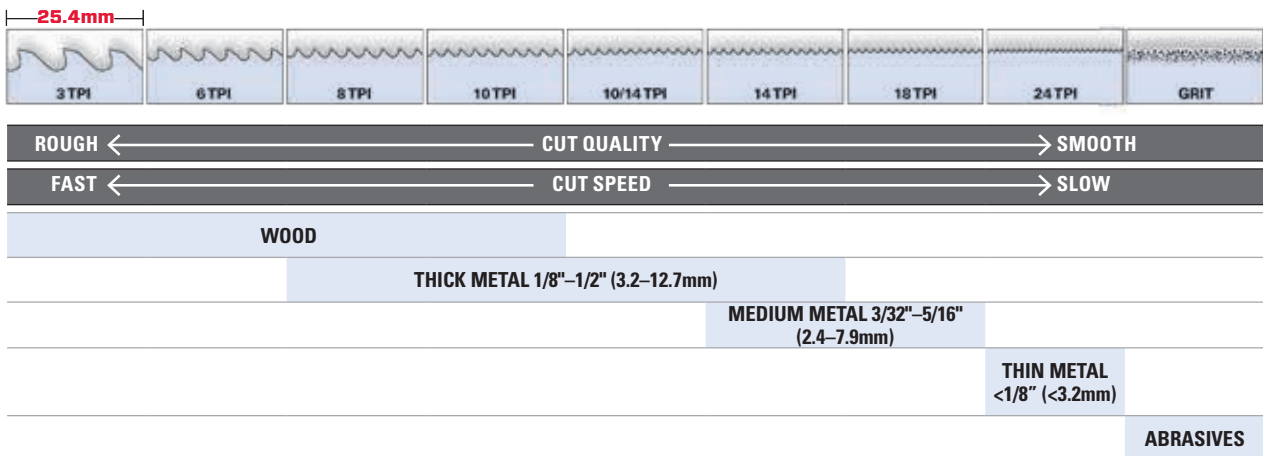

BLADE LENGTH SELECTION GUIDE

TIP Always keep 2-3 teeth in the material at all times

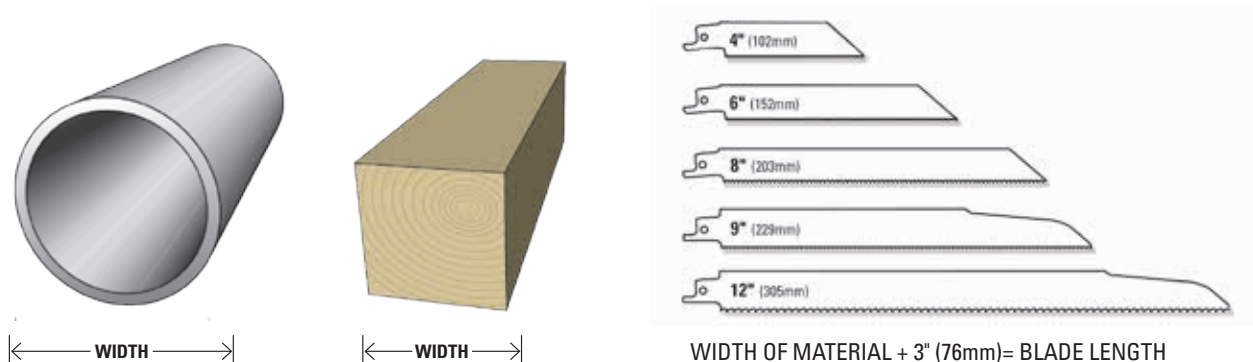

WIDTH OF MATERIAL + 3" (76mm) = BLADE LENGTH
 EXAMPLE: 5" (WIDTH) + 3" (76mm) = 8" (203mm).
 USE AN 8" (203mm) OR 9" (229mm) BLADE